


Features

- Extremely Low Minority Carrier Lifetime τ_C 15 ps (Typ)
- Very Low Capacitance – 1.5 pF (Max) @ $V_R = 15$ V
- Low Reverse Leakage – $I_R = 13$ nAdc (Typ)

Mechanical Data

- Case: SOD-323, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.004 grams (approx.)
- Marking: A3

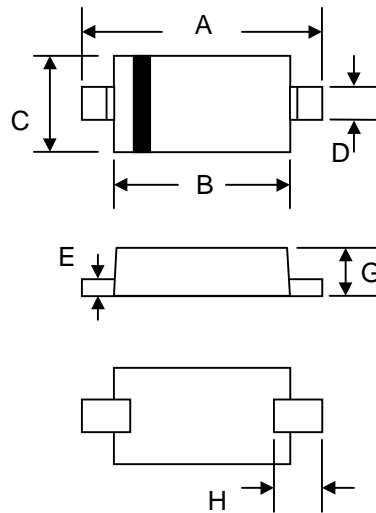

SOD-323		
Dim	Min	Max
A	2.30	2.70
B	1.75	1.95
C	1.15	1.35
D	0.25	0.35
E	0.05	0.15
G	0.70	0.95
H	0.30	—
All Dimensions in mm		

Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise specified

Symbol	Rating	Value	Unit
V_R	Reverse Voltage	30	Volts

Symbol	Characteristic	Max	Unit
P_D	Total Device Dissipation FR-5 Board,* $T_A = 25^\circ\text{C}$ Derate above 25°C	200	mW
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	1.57	$\text{mW}/^\circ\text{C}$
T_J, T_{stg}	Junction and Storage Temperature Range	635	$^\circ\text{C}/\text{W}$
		-55 to +150	$^\circ\text{C}$

Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage ($I_R = 10 \mu\text{A}$)	$V_{(BR)R}$	30	—	—	Volts
Total Capacitance ($V_R = 15$ V, $f = 1.0$ MHz) Figure 1	C_T	—	0.9	1.5	pF
Reverse Leakage ($V_R = 25$ V) Figure 3	I_R	—	13	200	nAdc
Forward Voltage ($I_F = 1.0$ mAdc) Figure 4	V_F	—	0.38	0.45	Vdc
Forward Voltage ($I_F = 10$ mAdc) Figure 4	V_F	—	0.52	0.6	Vdc

TYPICAL ELECTRICAL CHARACTERISTICS

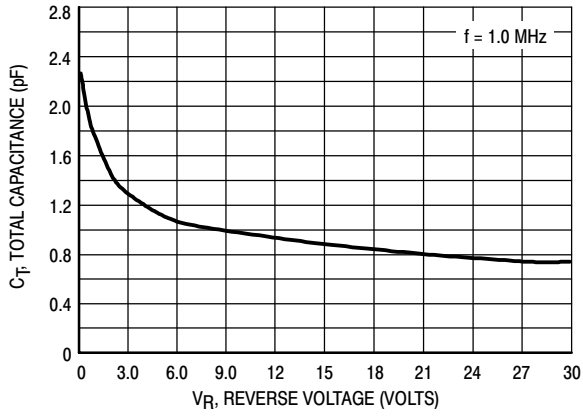


Figure 1. Total Capacitance

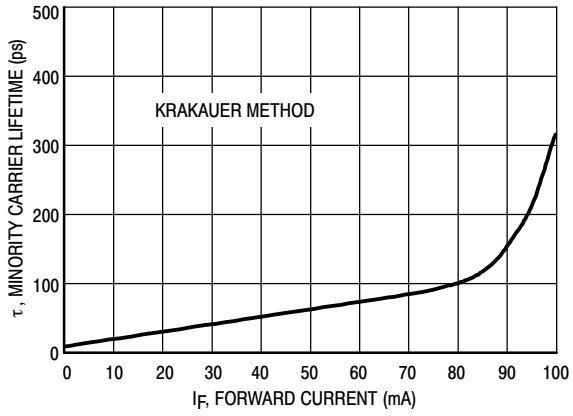


Figure 2. Minority Carrier Lifetime

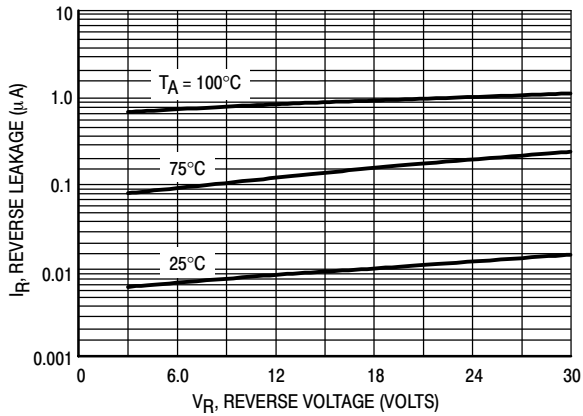


Figure 3. Reverse Leakage

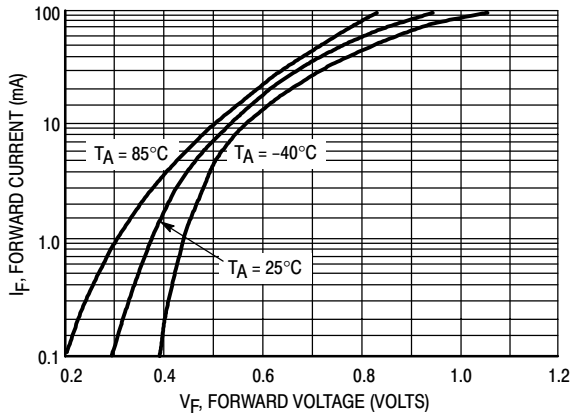


Figure 4. Forward Voltage

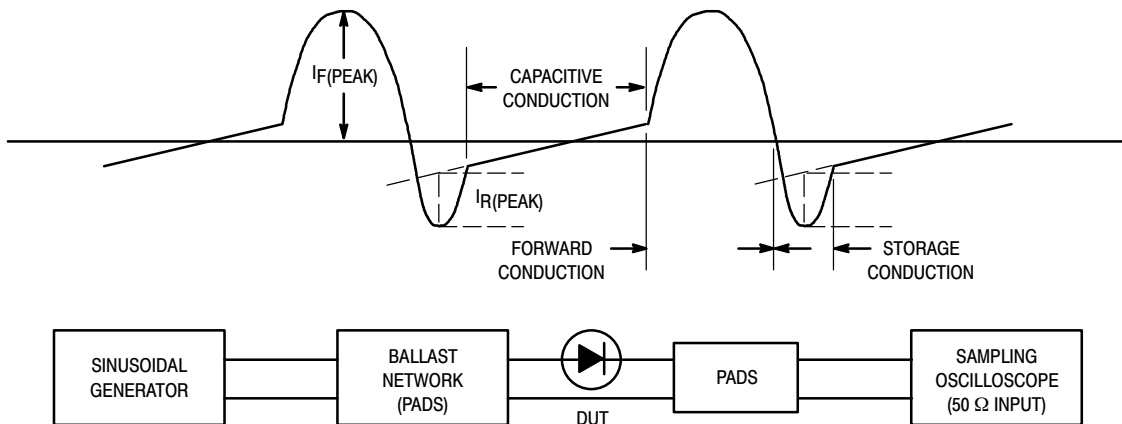


Figure 5. Krakauer Method of Measuring Lifetime